


Collection:Lyle Installation manual for:

LD6246BK D8"H11" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Put the canopy (P5) on the mounting bracket(P1) and tighten it with a nut (P6).
- 7.Install E26 light source, no include bulb.
- 8.Place the glass shade (P13) on the straight side disc (P11) and tighten it with a cap screw (P12).

The end!

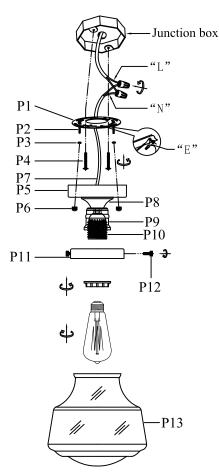

= Hot wire

= Neutral wire

= Ground wire

PARTS LIST

picture	Description	Qty	Check	list
0	D4" Mounting bracket	1		
	5/32-32 Screw	2		
()	Hex nut	2		
	5/32-32 Screw	2		
	D4.75" Canopy plat	1		
	Cap nut	2		
	Power Cord L2' 1332 18AWG Black&White	1		
	D2.6" Receiver bowl	1		
	D2" Socket cover	1		
	E26 Socket	1		
	D4.33" Straight edge disk	1		
7	Cap screw	3		
P13	D8"*H7.5" Glass shade	1		
	<u>•</u>	D4" Mounting bracket 5/32-32 Screw Hex nut 5/32-32 Screw D4. 75" Canopy plat Cap nut Power Cord L2' 1332 18AWG Black&White D2. 6" Receiver bowl D2" Socket cover E26 Socket D4. 33" Straight edge disk Cap screw	D4" Mounting bracket 1 5/32-32 Screw 2 Hex nut 2 5/32-32 Screw 2 D4.75" Canopy plat 1 Cap nut 2 Power Cord L2' 1332 18AWG Black&White 1 D2.6" Receiver bowl 1 D2" Socket cover 1 E26 Socket 1 D4.33" Straight edge disk 1 Cap screw 3	D4" Mounting bracket 1 5/32-32 Screw 2 Hex nut 2 5/32-32 Screw 2 D4.75" Canopy plat 1 Cap nut 2 Power Cord L2' 1332 1 18AWG Black&White 1 D2.6" Receiver bowl 1 D2" Socket cover 1 E26 Socket 1 D4.33" Straight edge disk Cap screw 3