

DURABASE® Fiberglass Shower Floors Rectangular, Single Threshold, 42"/48" Series



Design features:

- Sturdy, 1-piece molded fiberglass construction structural underbody for strength, slip resistant Starburst® surface
- Integral molded drain with seal for connection to 2" Sch. #40 ABS, PVC or iron DWV sanitary drain pipe. See optional drain seals for 1-1/2" pipe and 2" copper – removable strainer
- Available in White
- Semi-gloss surface resistant to mold and mildew, easy to clean
- Designed to be used with Mustee's DURAWALL® shower walls, ceramic tile or preformed wall kit


Code Accepted


- International Association of Plumbing and Mechanical Officials® (IAPMO®)
- Warnock Hersey® (Canada) Listed CSA test standards Shower Floor
- American National Standards Institute (ANSI) Specification ANSI Z 124-2017
- American Society of Testing and Materials (ASTM) E-84
- CAN/ULC S102-07 Burn and Smoke Test

Specifications

Model	Nom. Size	Color	UPC	Α	В	С	D	
4236M	42" x 36"	White	6 71031 00344 7	36"	42"	21"	18"	
4248M	42" x 48"	White	6 71031 00548 9	48"	42"	21"	24"	
4848M	48" x 48"	White	6 71031 00523 6	48"	48"	24"	24"	
4260M	42" x 60"	White	6 71031 00525 0	60"	42"	21"	30"	

General: Furnish and install as shown on plans. DURABASE® rectangular, single threshold shower floor model ______ as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size ____ " x ___ ". Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4-1/2" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Z 124-2017. Color: White.



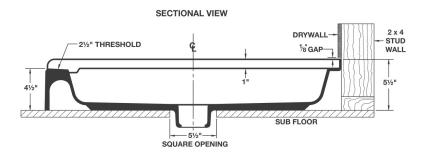



E.L. Mustee & Sons, Inc. • 5431 West 164th Street • Brook Park, OH 44142 • Phone: 216.267.3100 • Fax: 216.267.9997 E-mail: info@mustee.com. • Web: www.mustee.com • Proudly made in the USA



DURABASE® Fiberglass Shower Floor Accessories for 42"/48" Series

572T VARISTONE™— 5 PANEL SQUARE SHOWER WALLS, ADHESIVE-MOUNT



Model No.	Color	UPC	Fits DURABASE®
572TWHT	White	6 71031 00420 8	4236M

247 DURAWALL® — DELUXE THERMOPLASTIC 5-PANEL RECTANGULAR SHOWER WALLS, ADHESIVE MOUNT



Model No.	Color	UPC	Fits DURABASE®
247WHT	White	6 71031 00048 4	4236M, 4248M





DURABASE® Fiberglass Shower Floor Accessories for 42"/48" Series

STYLEMATE° — BY-PASS FRAMED AND BY-PASS FRAMELESS ENCLOSURES



M
M
M, 4848M
M, 4848M
M
M
M, 4848M
M
M

Mustee's DURABASE® Shower Floors are just the beginning of a beautiful shower space that can be created in virtually any location. The accessory products presented here will help you build the shower of your dreams, starting with Mustee's renown DURABASE® Shower Floors.


GapSeal-Pro™ — FOR ALL SHOWER FLOORS AND BATHTUBS



Model No.	Description	UPC
60.320A	132" long x 2" tall	6 71031 00496 3

The flexible PVC GapSeal-Pro™ features a strong adhesive strip that allows it to be easily positioned to "extend" tile flange and effectively seal the gap between drywall or like-surfaces on shower floors or bathtubs. Patent pending.

Drain Seals



Model No.	Description	UPC
32.404	Drain Seal for 2" copper pipe	6 71031 00313 3
32.405	Drain Seal for 1-1/2" ABS/PVC pipe	6 71031 00397 3

Designed to effectively seal the connection between DWV piping and the molded-in drain for all DURABASE® shower floors.

Strainers



Model No.	Description	
34.301	Strainer – Stainless steel	6 71031 00532 8
42.322	Strainer – Molded plastic - White	6 71031 00533 5
42.323	Strainer – Molded plastic - Bone	6 71031 00534 2
42.326	Strainer – Molded plastic - Chrome	6 71031 00493 2

Premium grade, removable strainers.

